

FH



SPECIFICATIONS

WEIGHT (LBS.)

Max GVWR	17,995
Front	6,660
Rear	12,700
Body/Payload	Up to 11,735

DIMENSIONS (IN.)

Wheelbase	114.6/130.3/150.0/169.7/181.5
Usable cab to rear axle	90.5/106.2/125.9/145.6/157.4
Overall length (End of frame)	206.9/222.6/257.3/285.4/302.6

ENGINE

Model	Mitsubishi 6D34-0AT2
Type	4-stroke cycle, watercooled, direct injection, turbocharged, intercooled diesel
No. of cylinders	Six in-line
Piston displacement	358 cu. in. (5.9 liters)
Max. output (SAE, gross)	175 hp/2,900 rpm
Max. torque (SAE, gross)	325 lb.ft./2,000 rpm
Air cleaner	Dry paper element with snorkel and rain cap
Starter	12-volt
Alternator	12-volt, 80 amp.

CHASSIS

Clutch		Hydraulic control, coil spring 12.8 in., single dry cerametallic plate
Transmission (Automatic option)		5 forward and 1 reverse speed, 2nd to 5th synchromesh, 1st and reverse constant mesh gears
	Ratio: manual	6.875/4.189/2.311/1.409/1.000, reverse 6.875
	Ratio: automatic	(Allison AT542)* 3.454/2.253/1.407/1.000, reverse 5.024
Axle	Front	Reverse Elliot, I-beam-type 7,275 lbs. capacity
	Rear	Full-floating-type 16,975 lbs. capacity
Final reduction gear		Single-reduction hypoid gear
	Ratio	4.111 (manual/automatic)
Tires		Single front, dual rear
	Size	LT215/75 R17.5 (12PR)
Steering		Ball-nut-type with integral-type hydraulic power booster. Telescopic and tilt steering column with steering lock
Suspension	Front	Heavy-Duty laminated leaf springs with shock absorbers and stabilizer bar
	Rear	Heavy-Duty laminated leaf springs
Brakes	Service	Hydraulically boosted, self-adjusting drum
	Parking	Internal expanding-type on propeller shaft
Fuel tank		33 gallons
Electrical system		Two 12-volt, maintenance-free batteries
Cab		All-steel, tilt cab

*Allison does not approve the AT542 Transmission for use in refuse packers or one-way rental operations.



FH

MITSUBISHI FUSO
TRUCK OF AMERICA, Inc.

P.O. Box 464, 100 Center Square Road
Bridgeport, NJ 08014

Vehicle specifications are subject to
change without notice.

Photos and descriptions may vary in
comparison to actual vehicle models.

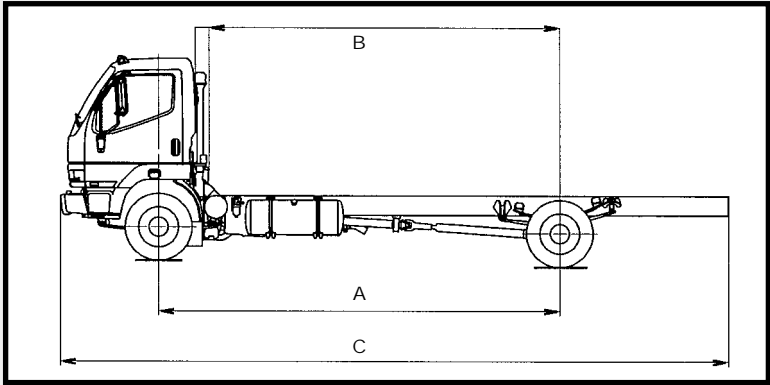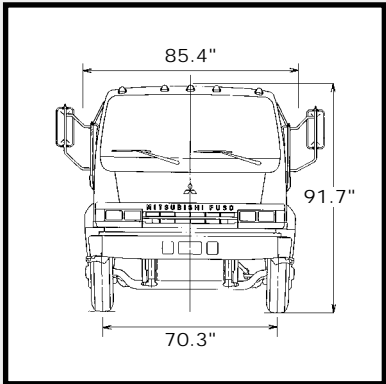

A. Wheelbase (in.)	114.6/130.3/150.0/169.7/181.5
B. Usable cab to rear axle (in.)	90.5/106.2/125.9/145.6/157.4
C. Overall length (in.)	206.9/222.6/257.3/285.4/302.6

