




1 9 9 7 F - S E R I E S
HEAVY DUTY/SUPER DUTY



F-Series Commercial



Ford F-Series
Regular Cab Pickup

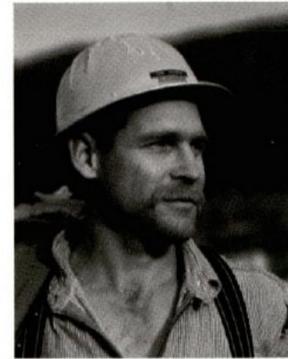


The Ford F-Series is America's favorite work truck, a proven performer. In ruggedness. In durability. In performance. And service. So when there's a job to do, turn to the truck that gets it done – the F-Series. *Built Ford Tough!*



Ford F-Series
SuperCab Pickup



Ford F-Series
Crew Cab Pickup

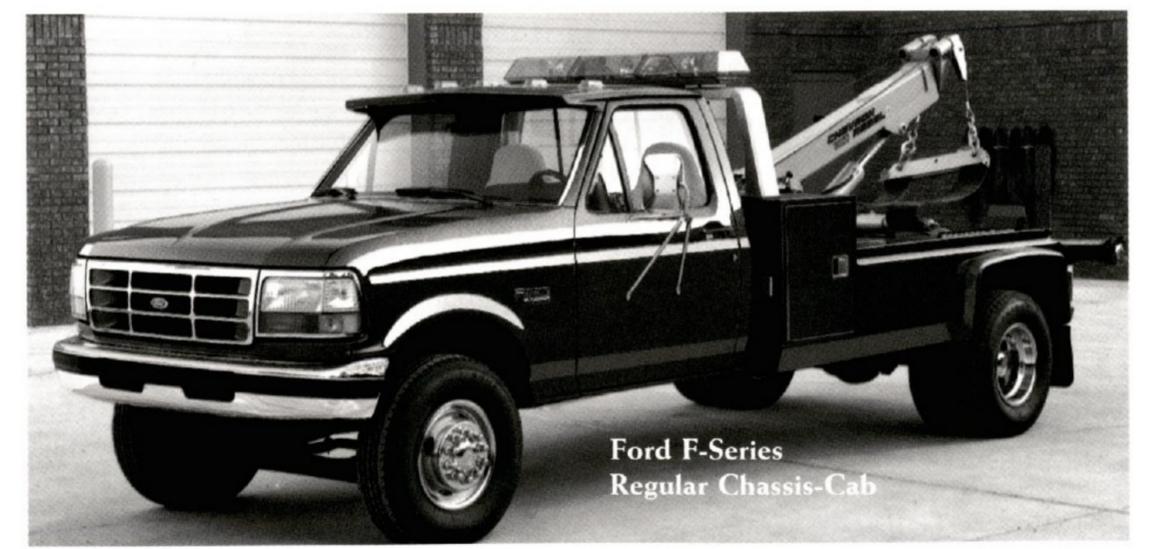

Ford F-Series
Regular Chassis-Cab

This brochure covers the F-250HD. The F-350. The F-Super Duty. Chassis-Cab and Stripped Chassis. Plus the F-Super Duty Motorhome Stripped Chassis. In a wide range of GVWRs, in three cab styles (Regular Cab, Crew Cab and SuperCab) 4x2 and 4x4 wheel-drive, plus powerteam choices designed to help you get the right truck for your application.

F-250HD/350



Pickup Specifications

F-250HD/350 REGULAR CAB SPECIFICATIONS

	Regular Cab 4x2	Regular Cab 4x4
GVWR range (lbs.)	8,600-10,000	8,600-9,000
Front axle range (lbs.)	4,200	4,600-5,000
Rear axle range (lbs.)	6,250-7,400	6,250
Front spring range (lbs.)	2,195-4,400	3,305-5,000
Rear spring range (lbs.)	6,141-7,963	6,148-7,596
4x4 front hubs	-	Std. automatic locking Opt. manual locking
Battery	Std. 72 AH Dual 78 AH with turbo diesel	Std. 72 AH Dual 78 AH with turbo diesel
Alternator	95 amps (gas engines) 130 amps (turbo diesel engine)	95 amps (gas engines) 130 amps (turbo diesel engine)
Fuel capacity (gals.)	Std. 37.2 Opt. 18.2 (SRW)	Std. 34.7* Opt. 18.2
Brakes	Power with rear anti-lock	Power with rear anti-lock

*40.2 w/7.3L diesel

F-250HD/350 SUPERCAB SPECIFICATIONS

	SuperCab 4x2	SuperCab 4x4
GVWR range (lbs.)	8,800-10,000	8,800
Front axle range (lbs.)	4,200	4,600
Rear axle range (lbs.)	6,250-7,400	6,250
Front spring range (lbs.)	3,140-4,400	3,305-4,600
Rear spring range (lbs.)	6,141-7,741	6,148-6,374
4x4 front hubs	-	Std. automatic locking Opt. manual locking
Battery	Std. 72 AH Dual 78 AH with turbo diesel	Std. 72 AH Dual 78 AH with turbo diesel
Alternator	95 amps (gas engines) 130 amps (turbo diesel engine)	95 amps (gas engines) 130 amps (turbo diesel engine)
Fuel capacity (gals.)	Std. 34.7 (138.8" wb) Std. 37.2 (155" wb)	Std. 34.7 (138.8" wb) Std. 37.2 (155" wb)
Brakes	Power with rear anti-lock	Power with rear anti-lock

F-250HD/350 CREW CAB SPECIFICATIONS

	Crew Cab 4x2	Crew Cab 4x4
GVWR range (lbs.)	8,800-10,000	8,800-9,200
Front axle range (lbs.)	4,200	4,600-5,000
Rear axle range (lbs.)	6,250-7,400	6,250
Front spring range (lbs.)	3,440-4,400	3,850-5,000
Rear spring range (lbs.)	6,141-7,741	6,148-7,596
4x4 front hubs	-	Std. automatic locking Opt. manual locking
Battery	Std. 72 AH Dual 78 AH with turbo diesel	Std. 72 AH Dual 78 AH with turbo diesel
Alternator	95 amps (gas engines) 130 amps (turbo diesel engine)	95 amps (gas engines) 130 amps (turbo diesel engine)
Fuel capacity (gals.)	Std. 34.7 (152.2" wb) Std. 37.2 (168.4" wb)	Std. 34.7 (152.2" wb) Std. 37.2 (168.4" wb)
Brakes	Power with rear anti-lock	Power with rear anti-lock

F-250HD/350 4x2 PAYLOAD PACKAGE SELECTOR

Regular Cab	Payload (lbs.)*	GVWR (lbs.)	Tires (Min.)
F-250HD (133" wb; 8' pickup box)	3,920	8,600	LT235/85R16E
F-350 (133" wb; 8' pickup box)	4,155	8,800	LT235/85R16E
F-350 DRW (133" wb; 8' pickup box)	5,100	10,000	LT215/85R16D
SuperCab			
F-250HD (138.8" wb; 6 1/2' pickup box)	3,835	8,800	LT235/85R16E
F-250HD (155" wb; 8' pickup box)	3,890	8,800	LT235/85R16E
F-350 DRW (155" wb; 8' pickup box)	4,655	10,000	LT215/85R16D
Crew Cab			
F-250HD (152.2" wb; 6 1/2' pickup box)	3,510	8,800	LT235/85R16E
F-350 (168.4" wb; 8' pickup box)	3,985	9,200	LT235/85R16E
F-350 DRW (168.4" wb; 8' pickup box)	4,620	10,000	LT215/85R16D

F-250HD/350 4x4 PAYLOAD PACKAGE SELECTOR

Regular Cab	Payload (lbs.)*	GVWR (lbs.)	Tires (Min.)
F-250HD (133" wb; 8' pickup box)	3,595	8,600	LT235/85R16E
F-350 (133" wb; 8' pickup box)	3,895	9,000	LT235/85R16E
SuperCab			
F-250HD (138.8" wb; 6 1/2' pickup box)	3,470	8,800	LT235/85R16E
F-250HD (155" wb; 8' pickup box)	3,540	8,800	LT235/85R16E
Crew Cab			
F-250HD (152.2" wb; 6 1/2' pickup box)	3,070	8,800	LT235/85R16E
F-350 (168.4" wb; 8' pickup box)	3,540	9,200	LT235/85R16E

*Maximum allowable weight of people, cargo and body equipment, and is reduced by the weight of optional equipment. Note: Most Regular Cab payloads can be increased if the single fuel tank option is ordered. See your dealer for details.

F-250HD/350 ENGINE SPECIFICATIONS

Engine	Bore x Stroke	Compression Ratio	Horsepower (SAE net)	Torque, lbs./ft. (SAE net)
5.8L EFI V8 (1)	4.00 x 3.50	8.8	210 @ 3,600 rpm	325 @ 2,800 rpm
5.8L EFI V8 (2)	4.00 x 3.50	8.8	205 @ 3,800 rpm	328 @ 2,200 rpm
7.5L EFI V8 (3)	4.36 x 3.85	8.5	245 @ 4,000 rpm	395 @ 2,400 rpm
7.5L EFI V8 (4)	4.36 x 3.85	8.5	245 @ 4,000 rpm	400 @ 2,400 rpm
7.3L Turbo Diesel	4.11 x 4.18	17.5	215 @ 3,000 rpm	425 @ 2,000 rpm

(1) 49 states.

(2) California.

(3) With 5-speed manual O/D transmission.

(4) 49 states with 4-speed automatic transmission. In California, 242 horsepower @ 4,000 rpm and 394 lbs./ft. torque @ 2,200 rpm with 4-speed automatic transmission.

F-250HD/350 4x2 POWERTEAMS

Engines	Regular Cab			SuperCab		Crew Cab		
	F-250 HD	F-350 SRW	F-350 DRW	F-250 HD	F-350 DRW	F-250 HD	F-350 SRW	F-350 DRW
5.8L EFI V8	S	S	S	S	-	-	S	S
7.5L EFI V8	O	O	O	O ⁽¹⁾	S	S	O	O
7.3L Turbo Diesel	O	O	O	O	O	O	O	O
Transmissions								
Heavy-duty 5-speed manual	S	S	S	S	S	S	S	S
Electronic 4-speed auto	O	O	O	O	O	O	O	O

(1) Standard with 139" wb.
HD = Heavy Duty. SRW = Single Rear Wheels. DRW = Dual Rear Wheels.
S = Standard. O = Optional.

F-250HD/350 4x4 POWERTEAMS



Engines	Regular Cab		SuperCab	Crew Cab	
	F-250 HD	F-350 SRW	F-250 HD	F-250 HD	F-350 SRW
5.8L EFI V8	S	S	S	-	S
7.5L EFI V8	O	O	O ⁽¹⁾	S	O
7.3L Turbo Diesel	O	O	O	O	O
Transmissions					
Heavy-duty 5-speed manual	S	S	S	S	S
Electronic 4-speed auto	O	O	O	O	O

(1) Standard with 139" wb.
HD = Heavy Duty. SRW = Single Rear Wheels.
S = Standard. O = Optional.

F-250HD/350 DIMENSIONS

	Series	WB (in.)	OAL (in.)	BL (ft.)	BW (in.)	LH (in.) 4x2/4x4	AC (in.) 4x2/4x4	Cargo (cu ft.)*
Regular Cab	F250 HD	133	213.3	8	70	32.2/35.1	8.3/8.3	75.6
	F-350 SRW	133	213.3	8	70	33.4/34.6	8.3/8.3	75.6
	F-350 DRW	133	213.3	8	70	32.5/-	7.6	75.6
SuperCab	F250 HD	139	219.1	6 1/2	70	33.6/35.3	8.3/8.3	62.9
	F250 HD	155	235.3	8	70	33.0/35.0	8.3/8.3	75.6
	F-350 DRW	155	235.3	8	70	32.4/-	7.6	75.6
Crew Cab	F-250 HD	152	232.5	6 1/2	70	32.0/33.4	8.3/8.3	62.9
	F-350	168	248.7	8	70	34.1/35.6	8.3/8.3	75.6
	F-350 DRW	168	248.7	8	70	32.9/-	7.6	75.6

WB = Wheelbase. OAL = Overall Length (without rear bumper). BL = Inside Box Length (nominal).
BW = Inside Box Width (maximum). LH = Load Height (estimated empty).
AC = Axle Clearance. HD = Heavy Duty. SRW = Single Rear Wheels.
DRW = Dual Rear Wheels. *Pickup box cargo volume without allowance for wheelhouses.

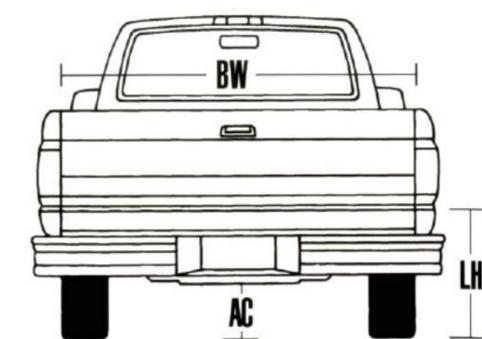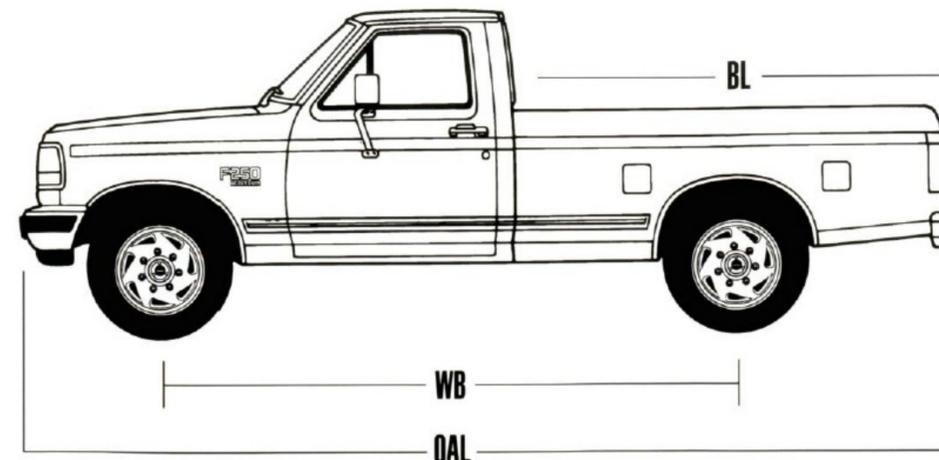

F-250HD Packages

	F-250HD Regular Cab		F-250HD SuperCab		F-250HD Crew Cab	
	XL 600A	XLT 603A	XL 610A	XLT 613A	XL 605A	XLT 606A
P = Preferred Equipment Package feature S = Standard feature O = Optional feature						
Seats						
Vinyl front bench seat	S	-	S	-	S	-
Cloth front flight bench seat with power lumbar support	-	S	-	-	-	S
Cloth and vinyl front bench seat	O	-	O	-	O	-
Cloth front and rear bench seats	-	-	-	S	-	-
Vinyl rear bench seat (cloth in XLT with captain's chairs)	-	-	S	O	-	-
Cloth front captain's chairs with floor console, power lumbar support, and cloth rear bench seat	-	-	O	O	-	-
Premium cloth 40/20/40 front bench seat with power lumbar support	-	O	-	O	-	O
Power driver's seat (with 40/20/40 bench seat)	-	-	-	O	-	-
Rear bench seat delete	-	-	O	-	-	-
Appearance/Comfort/Convenience						
Air conditioning	O	P	O	P	O	P
Argent rear step bumper	O	-	O	-	O	-
Chrome rear step bumper	O	O	O	O	O	O
Color-keyed cab steps	-	O	-	O	-	-
Floor carpet	O	S	O	S	O	S
Chrome appearance package	O	S	O	S	O	S
Roof clearance lights	O	O	O	O	O	O
Floor mat in lieu of carpet	S	O	S	O	S	O
Carpeted floor mats	-	-	-	-	-	O
Rear privacy glass	-	O	-	O	-	O
Interior enhancement/light group	O	P	O	P	O	P
Bright electric mirrors	-	O	-	O	-	O
Bright low-mount swingaway mirrors	O	O	O	O	O	O
Bright swing-out recreational mirrors	O	O	O	O	O	O
Deluxe two-tone paint	-	O	-	O	-	O
Lower accent two-tone paint	-	O	-	O	-	O
4x4 off-road decal not included (deletes 4x4 decal)	O	O	O	O	O	O
Sliding rear window	O	O	O	O	O	O
Speed control/tilt steering wheel	O	P	O	P	O	P
Tachometer	O	O	O	O	O	O
Safety/Security						
Power brakes with rear anti-lock system	S	S	S	S	S	S
Remote keyless entry system	-	O	-	O	-	O
Audio Systems						
Electronic AM radio, digital clock, two speakers	S	-	S	-	S	-
Electronic AM/FM stereo radio, digital clock, four speakers	O	S	O	S	O	S
Electronic AM/FM stereo radio, cassette player, digital clock, four speakers	O	P	O	P	O	P
Premium electronic AM/FM stereo radio, CD player, digital clock, four speakers and amplifier	-	O	-	O	-	O
Radio credit option (deletes AM radio and clock)	O	-	O	-	O	-
Performance						
5.8L V8/5-spd. manual transmission (4-spd. automatic optional)	S	S	S(3)	S(3)	-	-
7.5L V8/5-spd. manual or 4-spd. automatic transmission	O	O	O(4)	O(4)	S(1)	S(1)
7.3L Power Stroke Turbo Diesel/5-spd. manual or 4-spd. automatic transmission	O	O	O(5)	O(5)	O	O
Camper package	O	O	O(2)	O(2)	O(6)	O(6)
Super engine cooling (standard w/7.3L diesel)	O	O	O	O	O	O
Single fuel tank - gas engines only (deletes front fuel tank)	O	O	-	-	-	-
Handling package	O	O	O	O	O	O
Engine block heater	O	O	O	O	O	O
Manual locking hubs - 4x4 only (deletes standard automatic locking hubs)	O	O	O	O	O	O
Off-road package - 4x4 only	O	O	O	O	O	O
HD front suspension package	O	O	-	-	-	-
HD rear suspension package	O	O	O	O	-	-
Trailer towing package	O	O	O	O	O	O
Wheels/Tires						
Sport wheel covers	O	S	O	S	O	S
Forged aluminum wheels (SRW)	-	P	-	P	-	P
Rear spare wheel w/underframe carrier	O	O	O	O	O	O
LT235/85R16E BSW all-season (four)	S	S	S	S	S	S
LT235/85R16E BSW all-terrain (four) includes two all-terrain tires only on 4x2	O	O	O	O	O	O
Spare tire and wheel, all-terrain - 4x4 only w/underframe carrier	O	O	O	O	O	O
Spare tire and wheel with underframe carrier	O	O	O	O	O	O

(1) 5-spd. manual O/D transmission standard, 4-spd. automatic O/D optional. (2) N/A w/5.8L or 7.5L 139" wb 4x2 models. (3) N/A w/139" wb. (4) Standard w/139" wb. (5) N/A w/automatic transmission on 4x4 139" wb. (6) N/A w/7.5L 4x2 models.

F-350 Packages

	F-350 Regular Cab				F-350 SuperCab		F-350 Crew Cab			
	SRW 4x4 XL 640A	XL 642A	SRW/DRW XL 650A	XLT 651A	DRW 4x2 XL 617A	XLT 618A	SRW 4x2/4x4 XL 660A	XLT 661A	DRW 4x2 XL 670A	XLT 671A
P = Preferred Equipment Package feature S = Standard feature O = Optional feature										
Seats										
Vinyl front bench seat	S	-	S	-	S	-	S	-	S	-
Cloth front flight bench seat with power lumbar support	-	S	-	S	-	-	-	S	-	S
Cloth and vinyl front bench seat	O	-	O	-	O	-	O	-	O	-
Cloth front and rear bench seats	-	-	-	-	-	S	-	-	-	-
Vinyl rear bench seat (cloth in XLT, with captain's chairs)	-	-	-	-	S	O	-	-	-	-
Cloth front captain's chairs with floor console, power lumbar support and cloth rear bench seat	-	-	-	-	O	O	-	-	-	-
Premium cloth 40/20/40 front bench seat with power lumbar support	-	O	-	O	-	O	-	O	-	O
Power driver's seat (with 40/20/40 bench seat)	-	-	-	-	-	O	-	-	-	-
Rear bench seat delete	-	-	-	-	O	-	-	-	-	-
Appearance/Comfort/Convenience										
Air conditioning	O	P	O	P	O	P	O	P	O	P
Argent rear step bumper	O	-	O	-	O	-	O	-	O	-
Chrome rear step bumper	O	O	O	O	O	O	O	O	O	O
Color-keyed cab steps	-	O	-	O	-	O	-	-	-	-
Floor carpet	O	S	O	S	O	S	O	S	O	S
Chrome appearance package	O	S	O	S	O	S	O	S	O	S
Roof clearance lights (standard on DRW models)	O	O	S	S	-	-	O	O	S	S
Floor mat in lieu of carpet	S	O	S	O	S	O	S	O	S	O
Carpeted floor mats	-	-	-	-	-	-	-	O	-	O
Rear privacy glass	-	O	-	O	-	O	-	O	-	O
Interior enhancement/light group	O	P	O	P	O	P	O	P	O	P
Bright electric mirrors	-	O	-	O	-	O	-	-	O	-
Bright low-mount swingaway mirrors	O	O	O	O	O	O	O	O	O	O
Bright swing-out recreational mirrors	O	O	O	O	O	O	O	O	O	O
Deluxe two-tone paint	-	O	-	O	-	O	-	O	-	O
Lower accent two-tone paint	-	O	-	O	-	O	-	O	-	O
4x4 off-road decal not included (deletes 4x4 decal)	O	O	-	-	-	-	O	O	-	-
Sliding rear window	O	O	O	O	O	O	O	O	O	O
Speed control/tilt steering wheel	O	P	O	P	O	P	O	P	O	P
Tachometer	O	O	O	O	O	O	O	O	O	O
Safety/Security										
Power brakes with rear anti-lock system	S	S	S	S	S	S	S	S	S	S
Remote keyless entry system	-	O	-	O	-	O	-	O	-	O
Audio Systems										
Electronic AM radio, digital clock, two speakers	S	-	S	-	S	-	S	-	S	-
Electronic AM/FM stereo radio, digital clock, four speakers	O	S	O	S	O	S	O	S	O	S
Electronic AM/FM stereo radio, cassette player, digital clock, four speakers	O	P	O	P	O	P	O	P	O	P
Premium electronic AM/FM stereo radio, CD player, digital clock, four speakers and amplifier	-	O	-	O	-	O	-	O	-	O
Radio credit option (deletes AM radio and clock)	O	-	O	-	O	-	O	-	O	-
Performance										
5.8L V8/5-speed manual transmission (4-spd. automatic optional)	S	S	S	S	-	-	S	S	S	S
7.5L V8/5-spd. manual or 4-spd. automatic transmission	O	O	O	O	S(1)	S(1)	O	O	O	O
7.3L Power Stroke Turbo Diesel/5-spd. manual or 4-spd. automatic transmission	O	O	O	O	O	O	O	O	O	O
Camper/trailer towing package	O	O	O	O	O	O	O	O	O	O
Super engine cooling	O	O	O	O	O	O	O	O	O	O
Single fuel tank - gas engines only (deletes front fuel tank)	O	O	O	O	-	-	-	-	-	-
Auxiliary fuel tap	-	-	-	-	-	-	O	O	O	O
Handling package	O	O	O	O	O	O	O	O	O	O
Engine block heater	O	O	O	O	O	O	O	O	O	O
Manual locking hubs - 4x4 only (deletes standard automatic locking hubs)	O	O	-	-	-	-	O	O	-	-
Off-road package - 4x4 only	O	O	-	-	-	-	O	O	-	-
HD front suspension package	O	O	-	-	-	-	O	O	-	-
HD rear suspension package	O	O	-	-	-	-	O	O	-	-
Wheels/Tires										
Sport wheel covers (SRW)	O	S	O	S	-	-	O	S	-	-
Forged aluminum wheels (SRW)	-	P	-	P	-	-	-	P	-	-
Forged aluminum wheels (DRW)	-	-	-	O	-	O	-	-	-	O
Rear spare wheel with underframe carrier	O	O	O	O	O	O	O	O	O	O
LT215/85R16D BSW six all-season - DRW	-	-	S	S	S	S	-	-	S	S
LT235/85R16E BSW four all-season - SRW	S	S	S	S	-	-	S	S	-	-
LT215/85R16D BSW two all-season front/four all-terrain rear	-	-	O	O	O	O	-	-	O	O
LT235/85R16E BSW four all-terrain - SRW 4x4	O	O	-	-	-	-	O	O	-	-
LT235/85R16E BSW two all-season front/two all-terrain rear - SRW 4x2	O	O	O	O	-	-	O	O	-	-
Spare tire and wheel, all-terrain with underframe carrier - 4x4	O	O	-	-	-	-	O	O	-	-
Spare tire and wheel with underframe carrier	O	O	O	O	O	O	O	O	O	O

(1) 5-spd. manual O/D transmission standard, 4-spd. automatic optional - 4x2 only.

F-350/F-Super Duty



4x2 CHASSIS-CABS: TWIN-I-BEAM FRONT AXLE

	F-350 4x2 DRW	
Wheelbase (in.)	137	161
GVWR (lbs.)	10,000/11,000	10,000/11,000
Maximum payload (lbs.)	5,410/6,415	5,265/6,265
Front axle (lbs.)	4,200	4,200
Rear axle (lbs.)	8,250	8,250
Front spring range (combined rating @ ground)	3,365-4,400	3,365-4,400
Rear spring range (combined rating @ ground)	8,358	8,358
Fuel tank (gals.)	38 dual Opt. 19 single	38 dual Opt. 19 single
Tires	Six LT215/85R16D all-season	
Wheels	Six 8-hole disc/16"x6"K	
Shock absorbers	Gas-pressurized front/rear	
Battery	Std. 72 amp-hr. Opt. 78 amp-hr. Dual 78 amp-hr. std. with turbo diesel	
Alternator	95 amps with gas engines; 130 amps with turbo diesel	
Steering	Power	
Brakes	Power front disc and rear drum with rear anti-lock system	

DRW = Dual Rear Wheels. Note: Load rating represents maximum allowable weight of people, cargo and body equipment, and is reduced by weight of optional equipment. Payloads can be increased if the single fuel tank option is ordered. See your dealer for more information.



4x4 CHASSIS-CABS: MONOBEAM FRONT AXLE

	F-350 4x4 DRW	
Wheelbase (in.)	137	161
GVWR (lbs.)	11,000	11,000
Maximum payload (lbs.)	5,715	5,590
Front axle (lbs.)	5,000	5,000
Rear axle (lbs.)	8,250	8,250
Front spring range (combined rating @ ground)	4,100-5,000	4,100-5,000
Rear spring range (combined rating @ ground)	8,427	8,427
Fuel tank (gals.)	38 dual Opt. 19 single	38 dual Opt. 19 single
Tires	Six LT235/85R16E all-season	
Wheels	Six 8-hole disc/16"x6"K	
Shock absorbers	Gas-pressurized front/rear	
Battery	Std. 72 amp-hr. Opt. 78 amp-hr. Dual 78 amp-hr. std. with turbo diesel	
Alternator	95 amps with gas engines; 130 amps with turbo diesel	
Steering	Power	
Brakes	Power front disc and rear drum with rear anti-lock system	

DRW = Dual Rear Wheels. Note: Load rating represents maximum allowable weight of people, cargo and body equipment, and is reduced by weight of optional equipment. Payloads can be increased if the single fuel tank option is ordered. See your dealer for more information.

4x2 F-SUPER DUTY CHASSIS: MONOBEAM FRONT AXLE

	F-Super Duty 4x2 DRW		
Wheelbase (in.)	137	161	185
GVWR (lbs.)	15,000	15,000	15,000
Maximum payload (lbs.)	9,570	9,465	9,155
Front axle (lbs.)	5,000	5,000	5,000
Rear axle (lbs.)	11,000	11,000	11,000
Front spring range (combined rating @ ground)	5,000	5,000	5,000
Rear spring range (combined rating @ ground)	11,000	11,000	11,000
Fuel tank (gals.)	38 dual Opt. 19 single	38 dual Opt. 19 single	38 dual Opt. 19 single
Tires	Six LT235/85R16E all-season		
Wheels (type/rim size)	Six 10-hole disc/16"x6"K		
Shock absorbers	Gas-pressurized front/rear		
Battery	Std. 78 amp-hr. Dual 78 amp-hr. std. with turbo diesel		
Alternator	95 amps; 130 amps with turbo diesel		
Steering	Power		
Brakes	Power 4-wheel disc		

DRW = Dual Rear Wheels. Note: Load rating represents maximum allowable weight of people, cargo and body equipment, and is reduced by weight of optional equipment. Payloads can be increased if the single fuel tank option is ordered. See your dealer for more information.

Chassis Specifications

F-SUPER DUTY STRIPPED CHASSIS SPECIFICATIONS

Series	Motorhome Stripped Chassis 4x2 DRW	
Wheelbase (in.)	178/190/208/228	178/190
GVWR (lbs.)	17,000	15,200
Maximum payload (lbs.)	11,170/11,050/11,025/10,945	9,370/9,250
Axles (lbs.)	Front: 6,000 monobeam Rear: 11,000	6,000 monobeam 11,000
Spring range (combined rating @ ground)	Front: 6,000 Rear: 11,000	6,000 11,000
Steering and Brakes	Power/ Power 4-wheel disc	Power/ Power 4-wheel disc
Battery (amp-hr.)	72 (maintenance-free)	72 (maintenance-free)
Alternator (amp.)	130	130
Engine	7.5L EFI V8	7.5L EFI V8
Transmission	Standard: 4-spd. automatic E4OD Optional: -	4-spd. automatic E4OD
Fuel tank (gal.)	75 single	75 single
Tires (all-season)	Six LT235/85R16E	Six LT215/85R16E
Wheels (type/rim size)	Seven 10-hole disc, 16"x6"K	Seven 10-hole disc, 16"x6"K

F-SERIES CHASSIS-CAB DIMENSIONS

Series	Wheelbase	Overall Length	Cab-Rear Axle Length	Rear Axle/Frame Length	Frame Height* (Empty/Loaded)	Axle Height (Loaded)	Tread Width (Front/Rear)	Cab Height (Empty)
F-350 4x2 DRW	137"	217.8"	60.0"	47.5"	23.1"/20.4"	7.7"	65.7"/73.2"	73.5"
	161"	241.8"	84.0"	47.5"	23.1"/20.4"	7.7"	65.7"/73.2"	73.3"
F-350 4x4 DRW	137"	217.8"	60.0"	47.5"	27.8"/25.1"	8.3"	67.9"/67.1"	78.0"
	161"	241.8"	84.0"	47.5"	27.8"/25.1"	8.3"	67.9"/67.1"	78.0"
F-Super Duty 4x2 DRW	137"	217.8"	60.0"	47.5"	26.3"/23.5"	7.8"	67.0"/69.7"	77.5"
	161"	241.8"	84.0"	47.5"	26.3"/23.5"	7.8"	67.0"/69.7"	77.5"
	185"	265.8"	108.0"	47.5"	28.1"/23.8"	7.8"	67.0"/69.7"	77.5"

*At rear axle. DRW = Dual Rear Wheels.

POWERTEAMS

Engines	Twin-I-Beam Front Axle		Monobeam Front Axle	
	F-350 4x2 DRW	F-350 4x4 DRW	F-350 4x2 DRW	F-Super Duty 4x2 DRW
5.8L EFI V8	S*	-	-	-
7.5L EFI V8	O	S	S	S
Power Stroke 7.3L turbo diesel	O	O	O	O
Transmissions				
5-speed manual overdrive HD	S	S	S	S
Electronic 4-speed automatic overdrive (E4OD)	O	O	O	O

DRW = Dual Rear Wheels. HD = Heavy Duty. *Not available in California.

F-SUPER DUTY STRIPPED CHASSIS DIMENSIONS

F-Super Duty 4x2	Wheelbase	Overall Length	Rear Axle/Frame Length	Frame Height* (Empty/Loaded)	Axle Height (Loaded)	Tread Width (Front/Rear)
Motorhome Stripped Chassis	178"	317.8"	105.8"	32.8/27.4"	7.8"	71.7/71.7"
	190"	329.8"	105.8"	32.8/27.4"	7.8"	71.7/71.7"
	208"	347.8"	105.8"	32.8/27.4"	7.8"	71.7/71.7"
	228"	367.8"	105.8"	32.8/27.4"	7.8"	71.7/71.7"

*At rear axle.

Trailer Towing

F-SERIES PICKUPS - MAXIMUM TRAILER WEIGHTS WITH AUTOMATIC TRANSMISSION

Automatic	Axle Ratio	GCWR Max.	Regular Cab			SuperCab			Crew Cab						
			F-250 HD 4x2	F-250 HD 4x4	F-350 SRW 4x2	F-350 SRW 4x4	F-350 DRW 4x2	F-250 HD 4x2	F-250 HD 4x4	F-350 DRW 4x2	F-250 HD 4x2	F-250 HD 4x4	F-350 SRW 4x2	F-350 DRW 4x2	F-350 SRW 4x4
5.8L V8	3.55	11,500	6,500	6,100	6,600	6,100	-	6,300	5,900	-	-	-	-	-	-
	4.10	13,000	8,000	7,600	8,100	7,600	7,800	7,800	7,400	-	-	7,500	7,300	7,000	-
7.3L turbo	3.55	16,000	10,000	10,000	10,000	9,900	-	10,000	9,800	-	-	10,000	9,500	9,900	9,400
diesel	4.10	20,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000
7.5L V8	3.55	15,000	9,900	9,500	9,900	9,400	-	9,600	9,300	-	-	9,400	9,000	9,300	8,900
	4.10	18,500	10,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000

Note: See your Ford Dealer for required/recommended equipment and frontal area considerations.

Note: See your Ford Dealer for maximum trailer weight information for vehicles equipped with the manual transmission.

F-SERIES PICKUPS - MAXIMUM FIFTH WHEEL TRAILER WEIGHTS WITH AUTOMATIC TRANSMISSION

Automatic	Axle Ratio	GCWR Max.	Regular Cab			SuperCab			Crew Cab						
			F-250 HD 4x2	F-250 HD 4x4	F-350 SRW 4x2	F-350 SRW 4x4	F-350 DRW 4x2	F-250 HD 4x2	F-250 HD 4x4	F-350 DRW 4x2	F-250 HD 4x2	F-250 HD 4x4	F-350 SRW 4x2	F-350 DRW 4x2	F-350 SRW 4x4
5.8L V8	3.55	11,500	6,500	6,100	6,600	6,100	-	6,300	5,900	-	-	-	-	-	-
	4.10	13,000	8,000	7,600	8,100	7,600	7,800	7,800	7,400	-	-	7,500	7,300	7,000	-
7.3L turbo	3.55	16,000	10,000	10,100	10,500	9,900	-	10,200	9,800	-	-	10,100	9,500	9,900	9,400
diesel	4.10	20,000	14,000	14,000	14,000	14,000	14,000	14,000	13,800	14,000	14,000	13,500	13,900	13,800	13,400
7.5L V8	3.55	15,000	9,900	9,500	9,900	9,400	-	9,600	9,300	-	-	9,400	9,000	9,300	8,900
	4.10	18,500	12,500	12,500	12,500	12,500	12,500	12,500	12,500	12,500	12,500	12,500	12,500	12,500	12,500

Note: See your Ford Dealer for required/recommended equipment and frontal area considerations.

Note: See your Ford Dealer for maximum trailer weight information for vehicles equipped with the manual transmission.

F-SERIES CHASSIS-CAB AND STRIPPED CHASSIS - MAXIMUM TRAILER WEIGHTS WITH FIFTH WHEEL

Automatic	Axle Ratio	GCWR Max.	F-350 4x2 DRW	F-350 4x4 DRW	F-Super Duty 4x2
5.8L V8	4.10	13,000	8,000	-	-
Power Stroke	4.10	20,000	14,000	13,900	-
7.3L turbo diesel ⁽¹⁾	4.63	22,000	-	-	14,000
	5.13	22,000	-	-	14,000
7.5L V8	4.10	18,500	12,500	12,500	-
	4.63	22,000	-	-	12,500
	5.13	26,000 ⁽²⁾	-	-	12,500 ⁽²⁾

⁽¹⁾Vehicles equipped with Ambulance Preparation Package are not available for towing.

⁽²⁾25,000-lbs. GCWR, 8,000-lbs. maximum trailer weight at 17,000-lbs. GCWR (9,800-lbs. maximum trailer weight at 15,200-lbs. GCWR) with F-Super Duty Motorhome Stripped Chassis.

Note: See your Ford Dealer for required/recommended equipment and frontal area considerations.

Note: See your Ford Dealer for maximum trailer weight information for vehicles equipped with the manual transmission.

Note: Engine/axle ratio combinations may not be available in all areas. See your dealer for availability information. All maximum trailer weights shown must be reduced by passenger and cargo weight in the towing vehicle. Maximum trailer weights shown. The combined weight of the towing vehicle (including hitch, passengers and cargo) and the loaded trailer must not exceed the Gross Combined Weight Rating (GCWR).

Ownership Experience

ROADSIDE ASSISTANCE PROGRAM

Every new Ford includes the assurance of a 24-hour emergency Roadside Assistance Program provided during the 3-year/36,000-mile bumper-to-bumper warranty. Ask your dealer for complete details on this program which includes such services as fuel delivery, tire change, jump start, or even help when you're locked out of your truck.



Ford Credit offers a wide variety of financing and leasing programs to qualified buyers which can be arranged right at the dealership. Ask your Ford Dealer for the complete facts on these programs.



Optional Ford Extended Service Plans go beyond the 3-year/36,000-mile warranty. Ask your

dealer for complete details on the optional plans and for a copy of the limited warranty.

DEALER-INSTALLED ACCESSORIES

Your Ford Dealer offers a variety of quality Ford-brand accessories that meets or exceeds our strict specifications.

FORD CITIBANK CARD

Your Ford Citibank VISA® or MasterCard® could earn you hundreds, even thousands of dollars in Ford Rebates you can apply toward the purchase or Red Carpet Lease of a new Ford, Lincoln or Mercury. To apply, call 1-800-374-7777 or visit a Ford or Lincoln-Mercury dealership, or a branch of Citibank.

FEDERAL REGULATIONS

Federal regulations such as those issued by the National Highway Traffic Safety Administration, the Environmental Protection Agency or the Federal Highway Administration,

or issued pursuant to the Occupational Safety and Health Administration (OSHA) and/or state and local laws and regulations, may require additional equipment for the particular use you intend for the vehicle. It is the buyer's responsibility to determine the applicability of such laws and regulations to the buyer's intended use for the vehicle and to arrange for the installation of required equipment. Your dealer has information about the availability of many items of equipment which can be ordered for the vehicle.

ABOUT AFTERMARKET PRODUCTS

Many of the items shown on vehicles in this publication are available through retail organizations and establishments not connected with Ford Motor Company. Availability, price, quality and durability of these items rest solely with the respective manufacturers and their sales organizations; Ford assumes no responsibility for their use.

PRODUCT CHANGES

Following publication of this catalog, certain changes in standard equipment, options, prices and the like, or product delays, may have occurred which would not be included in these pages. Your Ford Dealer is your best source for up-to-date information. Ford Division reserves the right to change product specifications at any time without incurring obligations.

OPTIONS AVAILABILITY

Options shown or described in this catalog are available at extra cost and may be offered only in combination with other options or subject to additional ordering requirements or limitations.

For more information, visit our Web site at <http://www.ford.com>

